


PARTS LIST


In the unlikely event you are missing any components please call 0117 934 1790 and state the name of the product, size and description of the item. i.e. Classic Round Arch Matt Black 1.2m, End Plug.

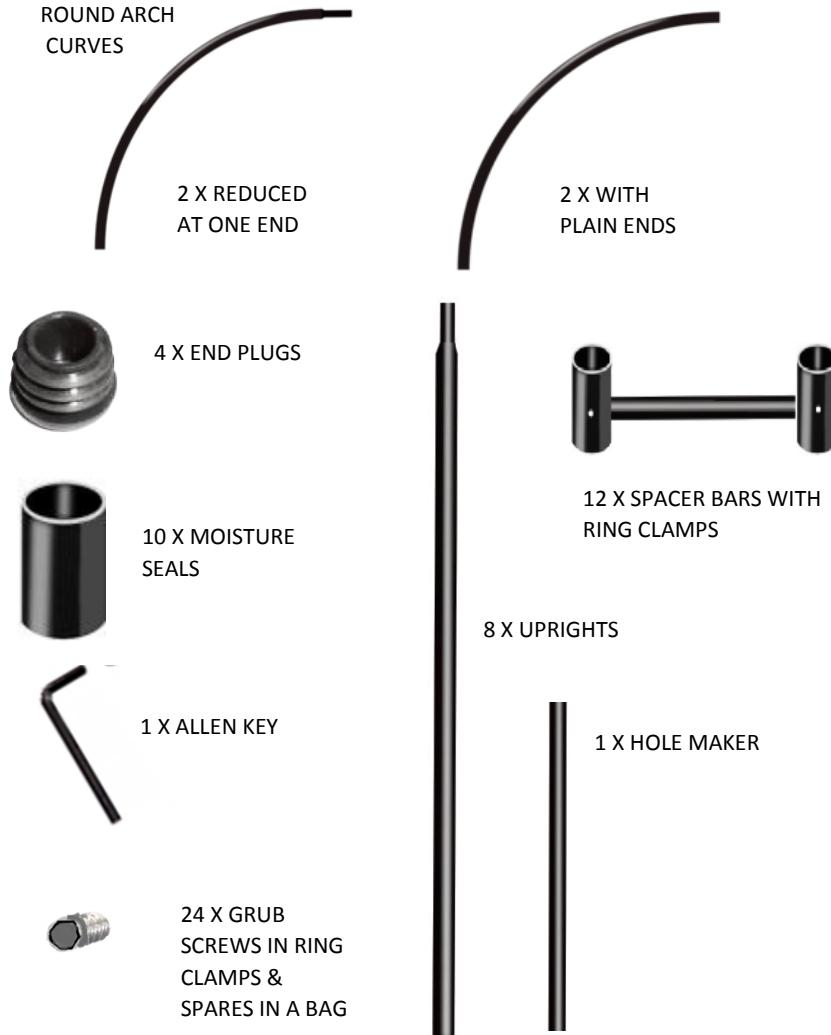

Agriframes™

Assembly Instructions for Classic Fruit Tree Arch

Product Code: 39045-TBK



Please read the assembly instructions carefully prior to construction.

Tips:

Positioning of the Spacer Bars

In many cases the position of the Spacer Bars is down to personal preference. However, if you have the lattice option you will need to leave the correct distance between bars.

On the bottom section the Spacer Bars need to be at least 3 inches above the base of the tube.

Tips:

Spacer Bars

Before positioning the Spacer Bars on the uprights, half screw in the grub screws to the ring clamps on the spacer bars, to reduce the risk of losing the screws. Once correctly positioned tighten the grub screw to secure the spacer bar to the uprights.

Lattice Panel Option

For illustrative purposes we have only shown one side fixed with the lattice panels. Attach panels to both sides as you proceed.

Issues:


If you are experiencing any issues with your Agriframes product please contact our customer services team on 0117 934 1790 and quote your order reference.

WARNING: Contains small parts, tools and plastic bags. Keep children away until the unit is assembled and everything is cleared away.

NOTE: the card, paper sack, and polythene bags are recyclable - please dispose of carefully.

MISSING PARTS PROCEDURE: please call our customer service team on 0117 934 1790 and quote your order reference and quote the missing part. *E.g. ASO----, 2 uprights missing.*

FRUIT TREE ARCH - MATT BLACK

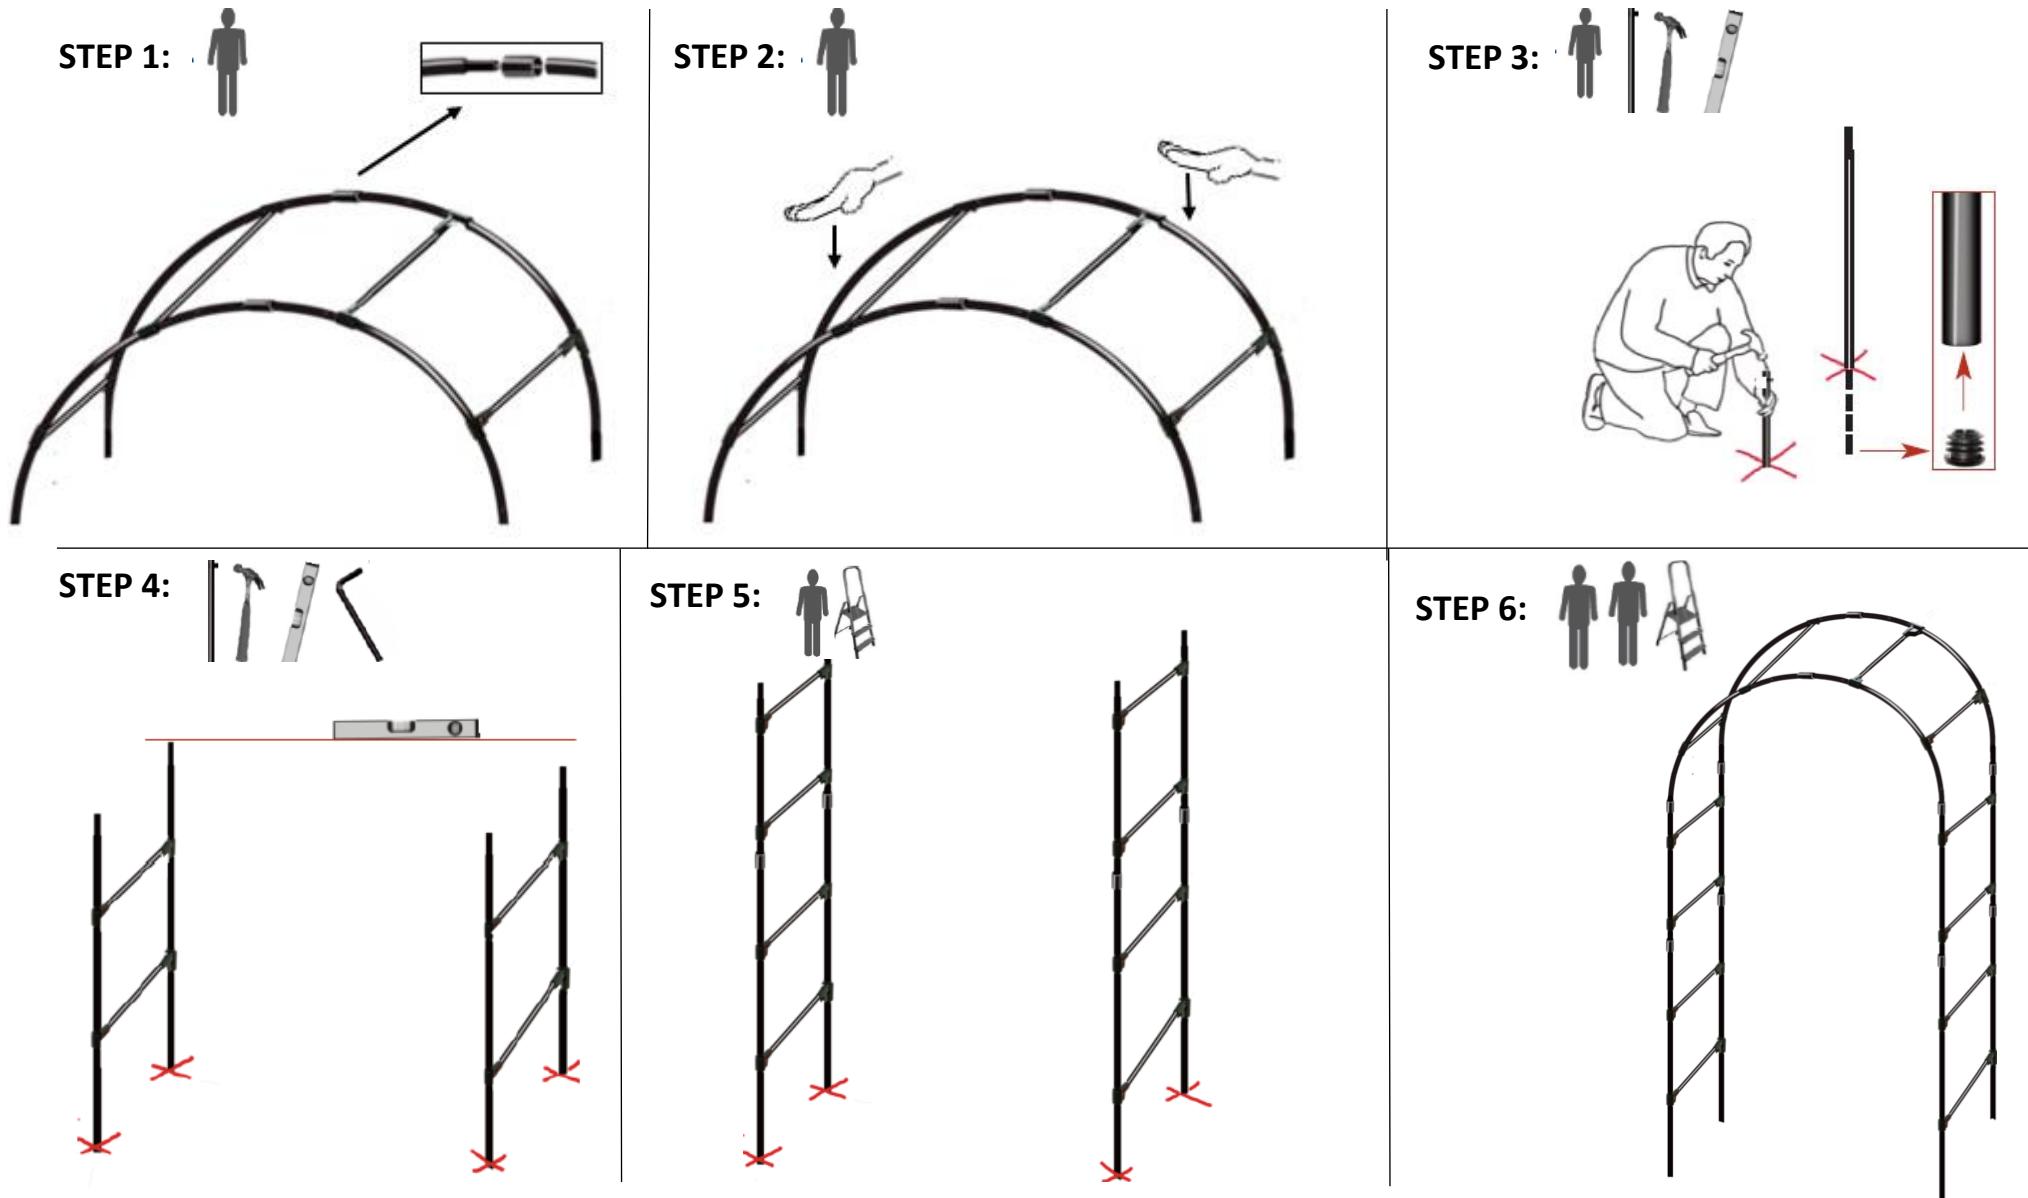

*

ONLY FOR ORDERS WITH LATTICE PANELS. PANELS CAN BE ORDERED FROM www.agriframes.co.uk

Assembly Instructions for Fruit Tree Arch - Matt Black

Please read these instructions carefully.

Assembly requires: a Rubber Mallet, an Allen Key (provided), a Ladder, a Spirit Level and a Tape Measure.

Step 1:

- Before assembly check Spacer Bars to ensure the grub screws are inserted into the holes on the ring clamps.
 - Loosen these grub screws $\frac{1}{2}$ way out of the hole, to ensure when the ring clamps are moved into position the grub screw does not scratch the outer coating of the metal.
- Connect the curves of the arch (insert the reduced ended curve into the plain ended curve) and cover the joints with a moisture seal.
- Slide the spacer bars on both sets of curves and tighten the grub screws until the spacer bars are secured into place on the curves.
 - We recommend that 4 Spacer Bars are attached to the top of the arch for stability, however this can be amended to suit the plants requirements.

Step 2:

- Once the top of the arch has been completed move the structure to where it will be installed and, firmly push the top of the arch into the ground to make an impression, indentation or mark where the uprights should be placed. Then remove the top structure and check that the marks can clearly be seen.

Step 3:

- Using the hole-maker make holes 13" into the ground, where you have marked or indented the ground previously, ensure that the holes are vertical and to the same depth.
- Insert the end plugs into the non-reduced ends of the 4 uprights and insert these uprights into the hole in the ground, ensure that the end plugs are facing downwards into the soil.

Step 4:

- The slide on the bottom spacer bars onto the uprights and tighten the grub screws.

Step 5:

- Slide a moisture seal over the reduced end of the uprights, then connect the remaining 4 uprights. Cover the join between the poles with a moisture seal.
- Slide over the remaining spacer bars onto the top of the uprights, then tighten the grub screws.

Step 6:

- Lift the constructed Arch top onto the uprights, cover the joins with moisture seals.
 - You will need at least 2 people for this step due to the weight of the Arch top.

If you have any questions regarding assembly please call our customer service team on 0117 934 1790